




TECHNICAL DATASHEET

Sealer Mikon® 399 MC

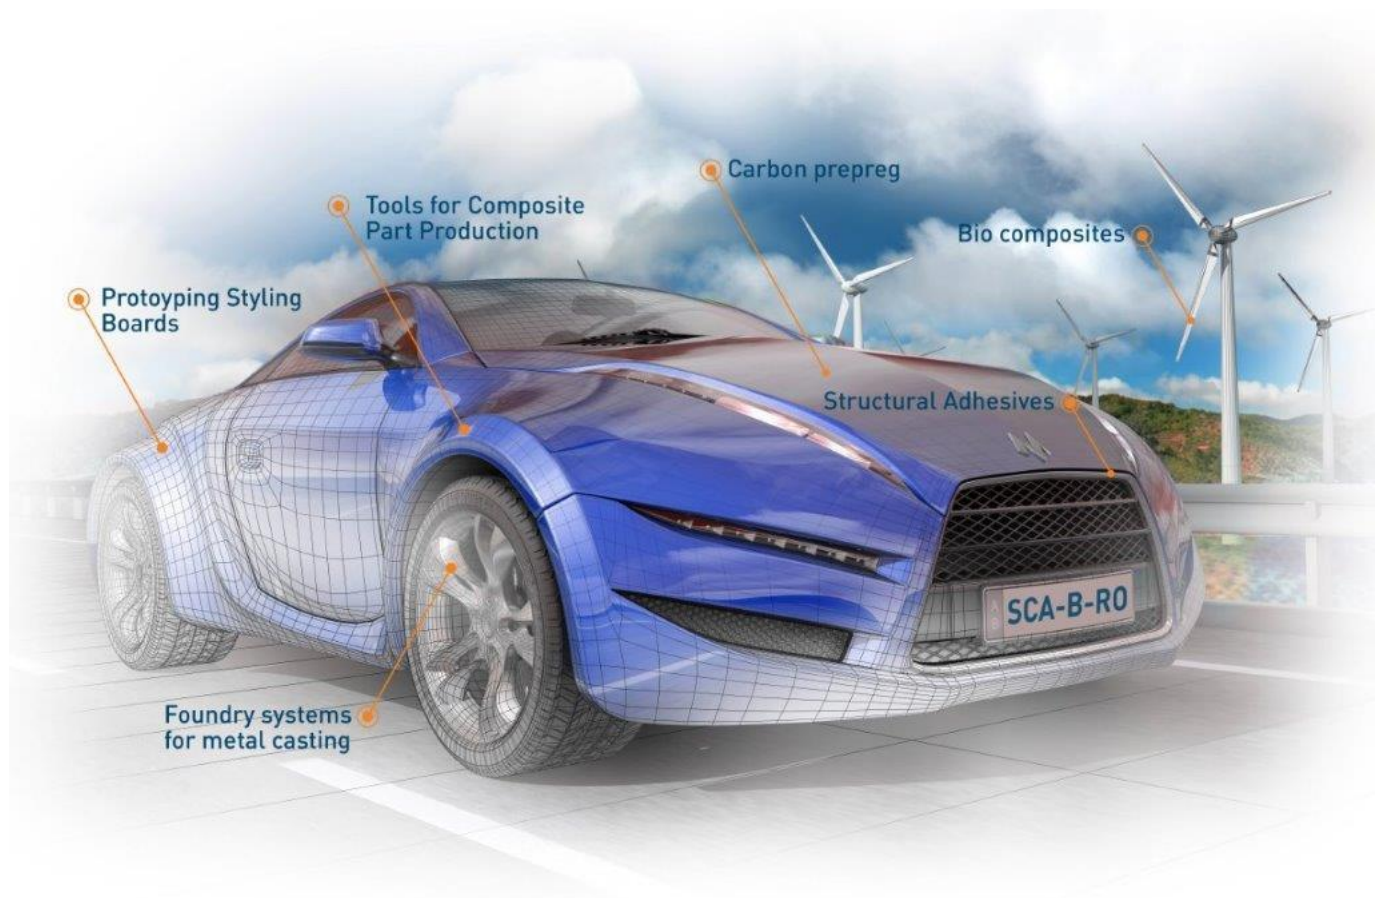

MALLENBOUW | COMPOSITEN | LIJMEN

Sealer Mikon® 399 MC

page: 1 / 1
 revision: 22.09.2017
 author: JHE / sde
 print: 22.09.2017

Description:

Sealer Mikon® 399 MC is a specially designed surface sealer for porous surfaces to seal them with a high quality finish. The product convinces with its simple application. If Sealer Mikon® 399 MC is handled properly, there will be no need to sand nor to polish.

Application Fields:

Sealing of porous surfaces, specifically block materials, MDF etc. Sealer Mikon® 399 MC is commonly used as a primer for modelmasters.

Application:

Sealer Mikon® 399 MC is ready-to-use and should not to be diluted. The surface to be sealed must be absolutely dustfree and free of grease residues. Optimal results are obtained by rubbing with a suitable lint-free cotton cloth. Usually, two coatings with an eventual sanding using an abrasive fleece are sufficient for perfect sealing. However, the appropriate number of coating layers depends on the porosity of the surface. A minimum curing time of 1 h at room temperature (20 °C) has to be respected after each application in order to guarantee proper sealing of the surface. Only very thin layers of Sealer Mikon® 399 MC must be applied as too thick layers tend to crack. For best release performance, we strongly recommend subsequent application of any semi-permanent release agent from our Mikon® product series. Both water- and solvent-based release agents will be adequate. Application equipment should be thoroughly cleaned immediately from liquid residues using NC solvent, universal thinner or solvent naphtha. Cured Sealer Mikon® 399 MC can only be mechanically cleaned / removed.

Technical Data

Composition:	resin solution
Appearance:	pink liquid
Density [g/cm³]:	approx. 1
Flashpoint [°C]:	44

Packaging:

Bottle 1,2 kg

Storage:

This product should be stored in tightly sealed containers and has to be protected from frost, heat and direct sunlight. If these rules are obeyed, the product can be stored for at least 24 months. The expiry date is stated beneath the production date on the labels of each container.

Regulatory information on safety and transportation is provided in the material safety data sheet.

Technical product information and data is based on the best information available and does not constitute or imply a warranty or patent infringement of any kind. The user is responsible for testing product suitability prior to product use in production. The data mentioned above do not constitute viable parts of a specification, for which further, separate agreements are necessary.



Management
 System
 ISO 9001:2015
 ISO 14001:2015
 www.tuv.com
 ID 9105031335

Viernheimer Str. 70-76
 D-69469 Weinheim
 Postfach 10 07 29
 D-69447 Weinheim
 Geschäftsführer:
 Wilhelm Münch, Michael Münch
 Amtsgericht Mannheim HRB 431102

Tel +49 6201 - 9983 0
 Fax +49 6201 - 9983 66
 info@muench-chemie.com
 www.muench-chemie.com
 USt.-IDNr. DE144497299
 Steuer-Nr. 47020 / 10016

Bankverbindungen

Deutsche Bank AG
 BLZ 670 700 24
 Kto. 586 896 300
 Swift Code/BIC: DEUT DE DB MAN
 IBAN: DE84 6707 0024 0586 8963 00

Volksbank eG
 BLZ 670 923 00
 Kto. 1 078 801
 Swift Code/BIC: GENO DE 61 WNM
 IBAN: DE40 6709 2300 0001 0788 01