




# TECHNICAL DATASHEET

## Adhesive Tape - LETAPE

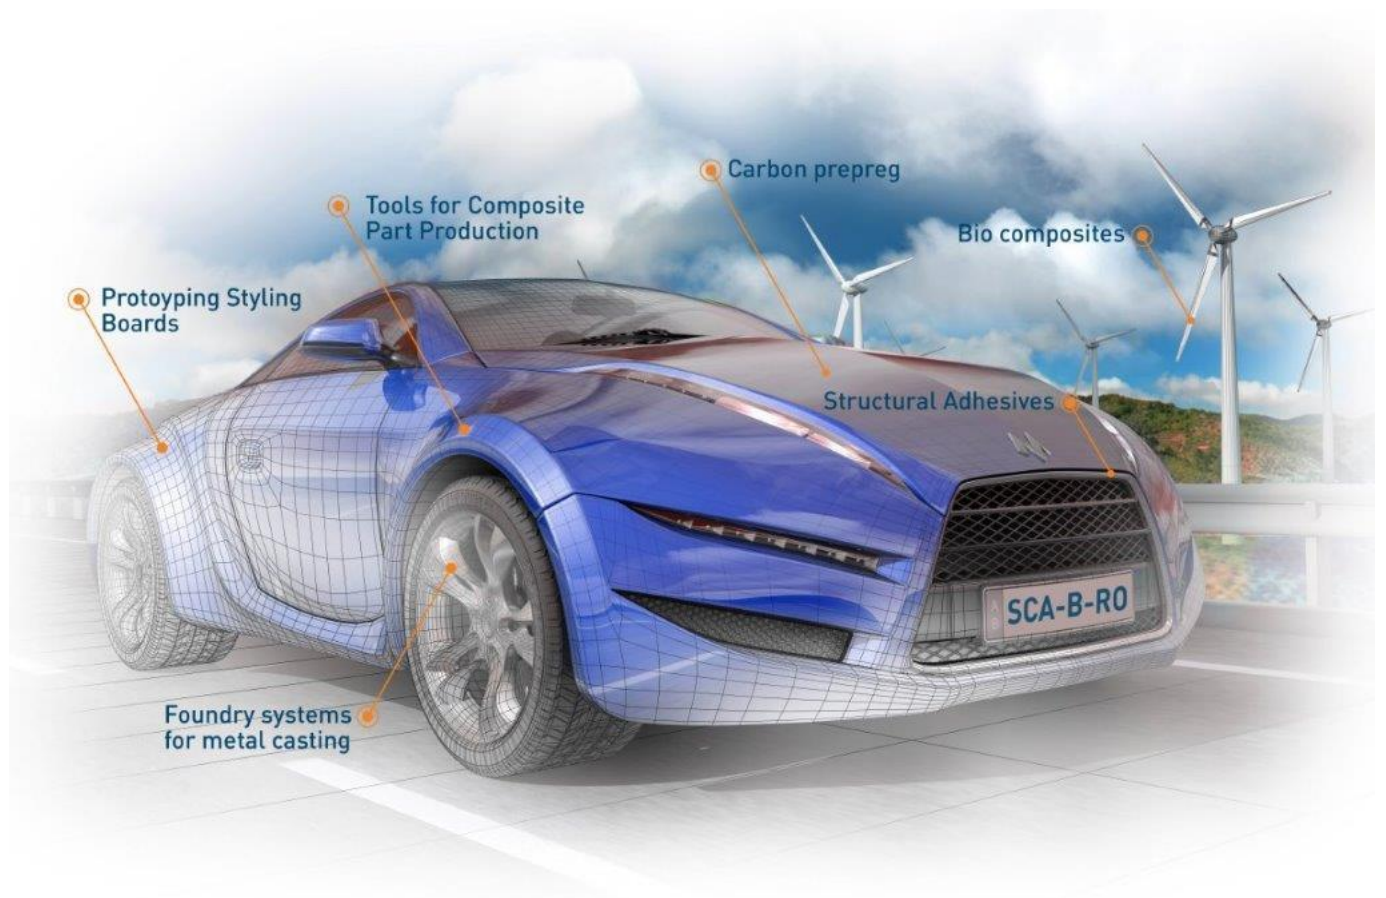

MALLENBOUW | COMPOSITEN | LIJMEN

## LETAPE

Adhesive tape

Ideally suited to tool maintenance applications

### Features and Benefits

- High modulus PTFE tape
- Excellent release and temperature resistance
- Application is very simple, due to the tape having no backing liner, and it strips easily after use
- Ideal for many applications including temporary tool surface repairs, sealing of split moulds to prevent resin preparation, and where localised tool release in tight angles is required

## PROPERTIES

Maximum cure temperature	180°C 232°C	356°F 450°F
Colour	Brown	
Adhesive	Acrylic and Silicone	
Carrier	PTFE	
Total thickness	89µm	0.0035in
Adhesive thickness	38µm	0.0015in
Tape thickness	51µm	0.002in
Elongation at break	150%	

## AVAILABILITY

Standard width	Up to 100mm	Up to 3.9in
Standard length	33m	36yd

## STORAGE

No special storage conditions.

## HEALTH & SAFETY

Please refer to the product MSDS for safe handling, personal protective equipment recommendations and disposal considerations.

DISCLAIMER: The data and information provided in this document have been obtained from carefully controlled samples and are considered to be representative of the product described. Solvay does not express or imply any guarantee or warranty of any kind including, but not limited to, the accuracy, the completeness or the relevance of the data and information set out herein. Because the properties of this product can be significantly affected by the fabrication and testing techniques employed, and since Solvay does not control the conditions under which its products are tested and used, Solvay cannot guarantee the properties provided will be obtained with other processes and equipment. No guarantee or warranty is provided if the product is adapted for a specific use or purpose. Solvay declines any liability with respect to the use made by any third party of the data and information contained herein. Solvay has the right to change any data or information when deemed appropriate. All trademarks are the property of their respective owners. ©2017, Solvay. All rights reserved.

### Solvay

Composite Materials HQ  
4500 McGinnis Ferry Rd  
Alpharetta, GA 30005-3914 USA

21 March 2013

